

R2KA 24 /8

Submittal



R2KA 24/8 is a premier premix gas-fired combination boiler that complies with ANSI Z21.13 and CSA 4.9 GAS FIRED LOW PRESSURE STEAM AND HOT WATER BOILERS. The R2KA 24/8 models are equipped Combi-Tech® stainless steel heat exchanger that consists of a Combi-Tech® stainless steel heat exchanger that consists of an outer tube coil with a diameter of 28 mm and integrated with the outer coil is an inner coil for the production of DHW. The Combi-Tech® design along with an indirect tank, combined together forms the DUALTECH design. DHW is heated first by entering the Combi-Tech® exchanger and then by the indirect tank providing generous amounts of hot water at the desired temperature instantaneously. DUALTECH design produces lesser emissions, increased energy savings and produces higher efficiencies making the DUALTECH design the ideal response for those who do not accept compromises in performance, reliability and efficiency. The R2KA 24/8 The Combi-Tech design along with an indirect tank, combined together forms the DUALTECH design. DUALTECH design produces lesser emissions, increased energy savings and produces higher efficiencies making the DUALTECH design the ideal response for those who do not accept compromises in performance, reliability and efficiency.

MAIN FEATURES

ANTI-FREEZE FUNCTION PROTECTION

OUTDOOR RESET

WIDE MODULATING RANGE

LOW NOX EMISSIONS

AUTOMATIC BY-PASS FITTED

PRE-WIRED ELECTRICAL LEAD

FULL GAS/AIR MODULATION

MIXED ZONE CARD (OPTIONAL)

SOLAR CARD CONTROL (OPTIONAL)

TIME AND TEMPERATURE CONTROLLERS (OPTIONAL)

WARRANTY HEAT EXCHANGER: 12 YEARS;

WARRANTY COMPONENTS: 2 YEARS.

TECHNICAL FEATURES

MODEL	R2KA 24 /8	
AFUE		95%
Maximum central heating input	btu/h - (kW)	88716 - (26)
Maximum domestic hot water input	btu/h - (kW)	98952 - (29)
Minimum central heating input	btu/h - (kW)	13650 - (4)
Minimum domestic hot water input	btu/h - (kW)	13650 - (4)
Adjustable central heating range	°F - (°C)	86-176 / 77-113 (30-80 / 25-45)
Maximum operating temperature for central heating	°F - (°C)	203 - (95)
Maximum operating pressure for central heating	psi - (bar)	60 - (4.1)
Capacity of the system expansion vessel	gal(US) - (litres)	2.11 - (8)
Domestic hot water temperature range	°F - °C	95-140 (35-60)
Maximum pressure for domestic hot water	psi - (bar)	150 - (10.34)
Minimum pressure for domestic hot water	psi - (bar)	7.25 - (0.5)
Storage tank capacity	gal(US) - (litres)	2.1 (8)
Continuous hot water flow rates (1 hour): ΔT 54°F (30°C)	gal(US) - (litres)	318.6 - (1206)
Continuous hot water flow rates (1 hour): ΔT 77°F (43°C)	gal(US) - (litres)	192.4 - (728)
Hot water flow rates (first 10 minutes): ΔT 54°F (30°C)	gal(US) - (litres)	56.3 - (213)
Hot water flow rates (first 10 minutes): ΔT 77°F (43°C)	gal(US) - (litres)	33.3 - (126)
Width	in - (mm)	17.7 - (450)
Depth	in - (mm)	14.3 - (365)
Height	in - (mm)	30.9 - (785)
Gross weight	lb - (Kg)	103.6 - (47)
Electric consumption - normal	W	78
Electric consumption - Standby	W	3.5
Insulation rate	IP	X4D
AFUE	%	96

PROJECT NO.:

REPRESENTATIVE:

NAME:

DATE:

LOCATION:

SPECIFIER:


APPROVED BY:

CONTRACTOR:

DATE:




OVERALL DIMENSIONS (INCH)

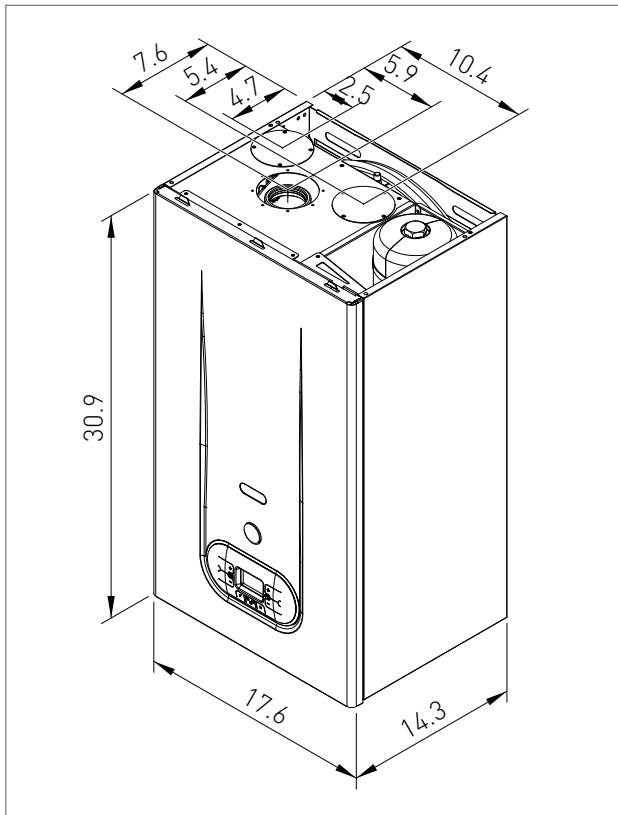


TYPES OF EXHAUST SYSTEMS

- > COLLINEAR VENT, CO-AXIAL VENT AND SINGLE VENT.
- > PVC, CPVC AND POLYPROPYLENE FOR SIZES 2", 3" AND 4" DIAMETERS.
- > FOR CANADA USE GAS VENTING SYSTEMS CERTIFIED TO ULC S636.

CIRCULATOR PREVALENCE/FLOW DIAGRAM

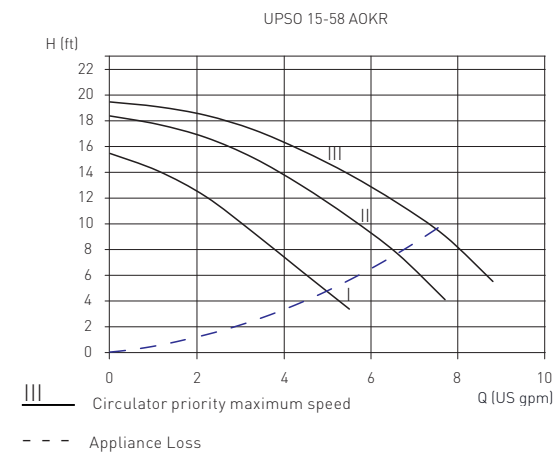


JIG

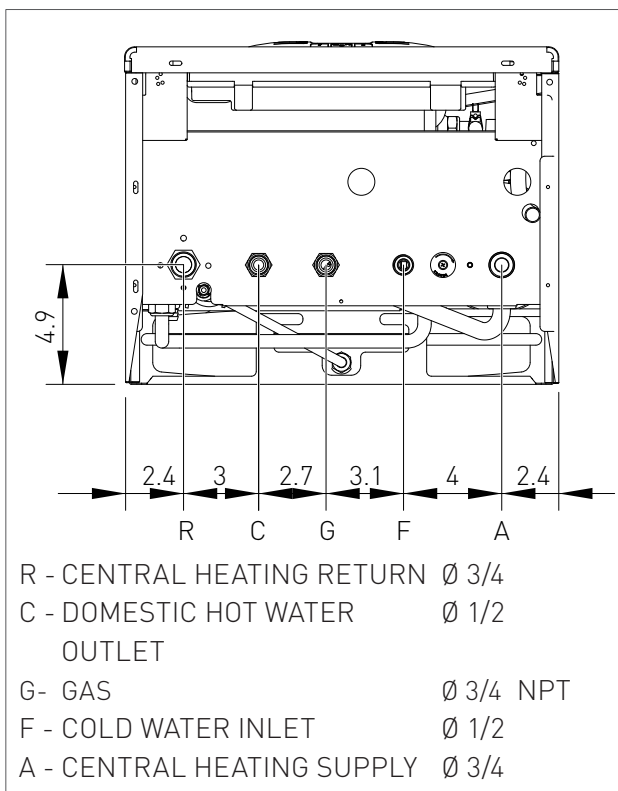


HYDRAULIC CONNECTION KIT

An hydraulic kit equipped is available and supplied by RADIANT upon demand.

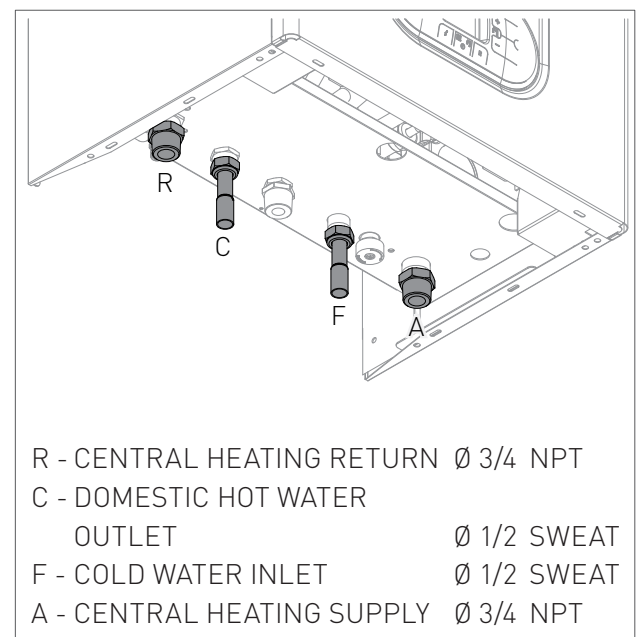


TECHNICAL ASSEMBLY

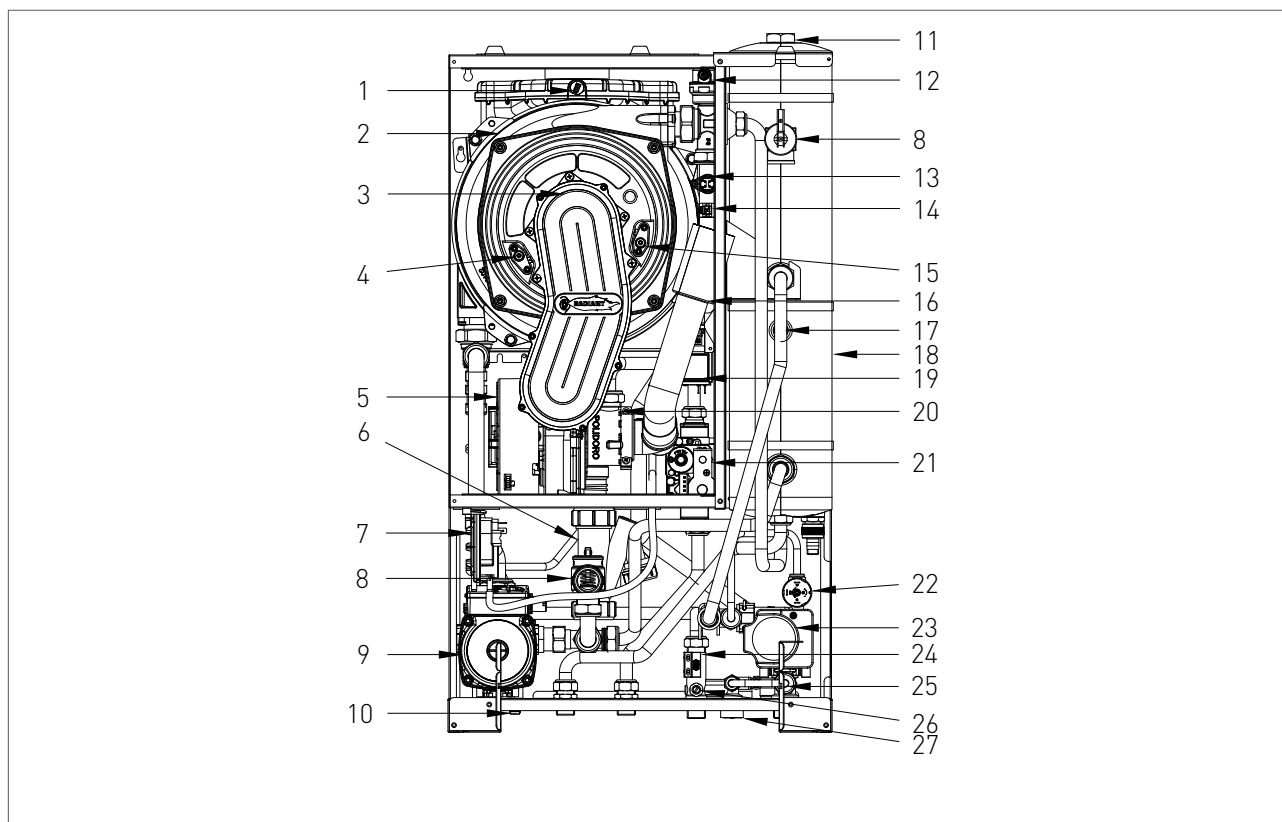

KEY

- | | |
|---|------------------------|
| 1. EXHAUST SAFETY HIGH LIMIT SWITCH | 23. DIVERTER VALVE |
| 2. INTEGRATED HEAT EXCHANGER | 24. FLOW LIMITER |
| 3. BURNER UNIT | 25. CHECK VALVE |
| 4. IONIZATION ELECTRODE | 26. FLOW SWITCH |
| 5. COMBUSTION BLOWER | 27. SYSTEM FILLING TAP |
| 6. CONDENSATE COLLECTION SIPHON | |
| 7. AIR PRESSURE SWITCH | |
| 8. PRESSURE RELIEF VALVE | |
| 9. CIRCULATOR | |
| 10. SYSTEM DRAINING TAP | |
| 11. ANODE | |
| 12. AIR ELIMINATOR | |
| 13. WATER TEMPERATURE HIGH LIMIT SWITCH | |
| 14. CENTRAL HEATING TEMPERATURE PROBE | |
| 15. SPARK ELECTRODE | |
| 16. AIR SUCTION TUBE | |
| 17. DOMESTIC TEMPERATURE PROBE | |
| 18. INDIRECT TANK | |
| 19. IGNITION TRANSFORMER | |
| 20. PROPORTIONAL VENTURI | |
| 21. GAS VALVE | |
| 22. WATER PRESSURE TRANSDUCER | |

HYDRAULIC BOARD

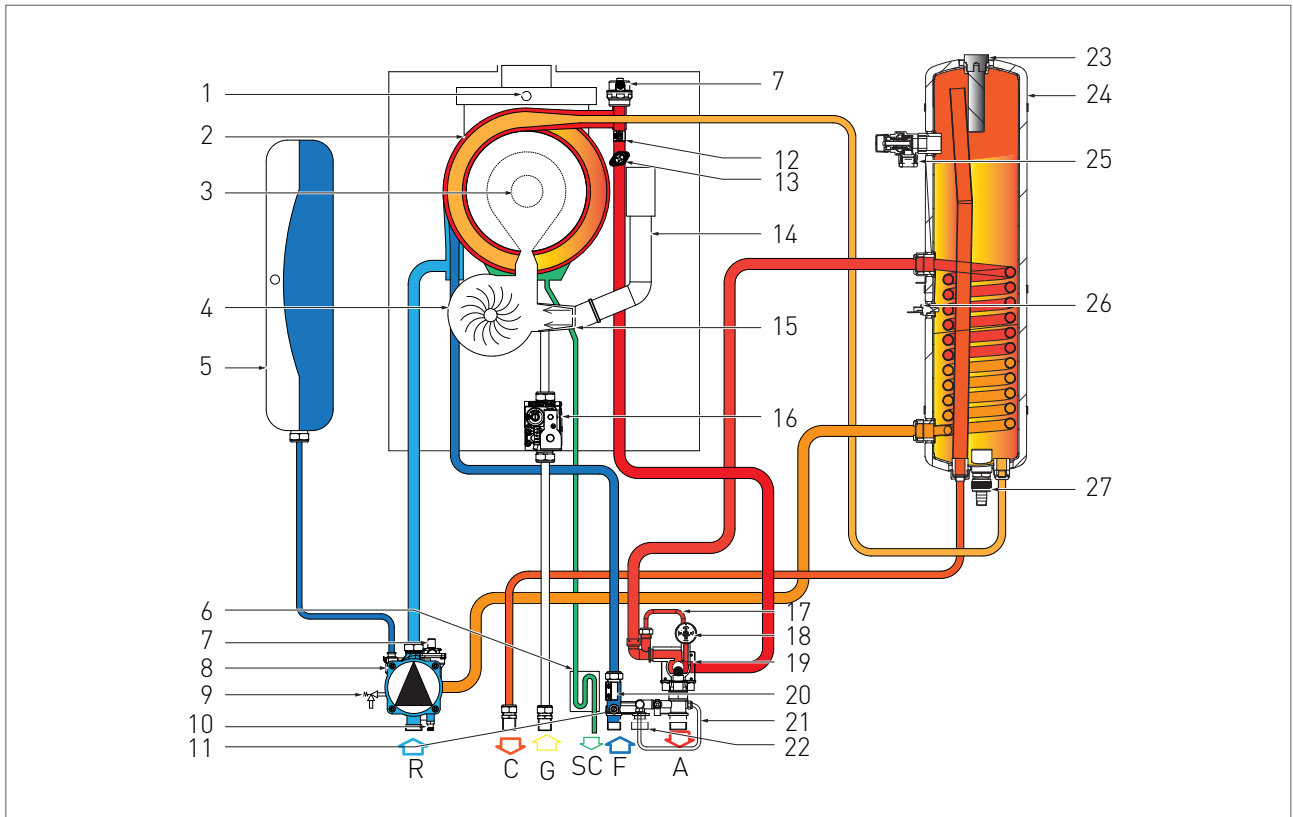


KEY

- | | |
|---|--|
| R. CENTRAL HEATING RETURN | 11. FLOW LIMITER |
| C. DOMESTIC HOT WATER OUTLET | 12. CENTRAL HEATING TEMPERATURE PROBE |
| G. GAS INLET | 13. WATER TEMPERATURE HIGH LIMIT SWITCH |
| SC. CONDENSATE DRAIN | 14. AIR SUCTION TUBE |
| F. COLD WATER INLET | 15. PROPORTIONAL VENTURI |
| A. CENTRAL HEATING SUPPLY | 16. GAS VALVE |
| | 17. BY-PASS |
| 1. EXHAUST SAFETY HIGH LIMIT SWITCH | 18. WATER PRESSURE TRANSDUCER |
| 2. INTEGRATED HEAT EXCHANGER | 19. DIVERTER VALVE |
| 3. BURNER UNIT | 20. FLOW SWITCH |
| 4. COMBUSTION BLOWER | 21. CHECK VALVE |
| 5. THERMAL EXPANSION TANK | 22. SYSTEM FILLING TAP |
| 6. CONDENSATE COLLECTION SIPHON | 23. ANODE |
| 7. AIR ELIMINATOR | 24. INDIRECT TANK |
| 8. CIRCULATOR | 25. PRESSURE RELIEF VALVE 150 psi (10.3 bar) |
| 9. PRESSURE RELIEF VALVE 30 psi (2 bar) | 26. DOMESTIC TEMPERATURE PROBE |
| 10. SYSTEM DRAINING TAP | 27. TANK DRAINING TAP |



WIRING DIAGRAM

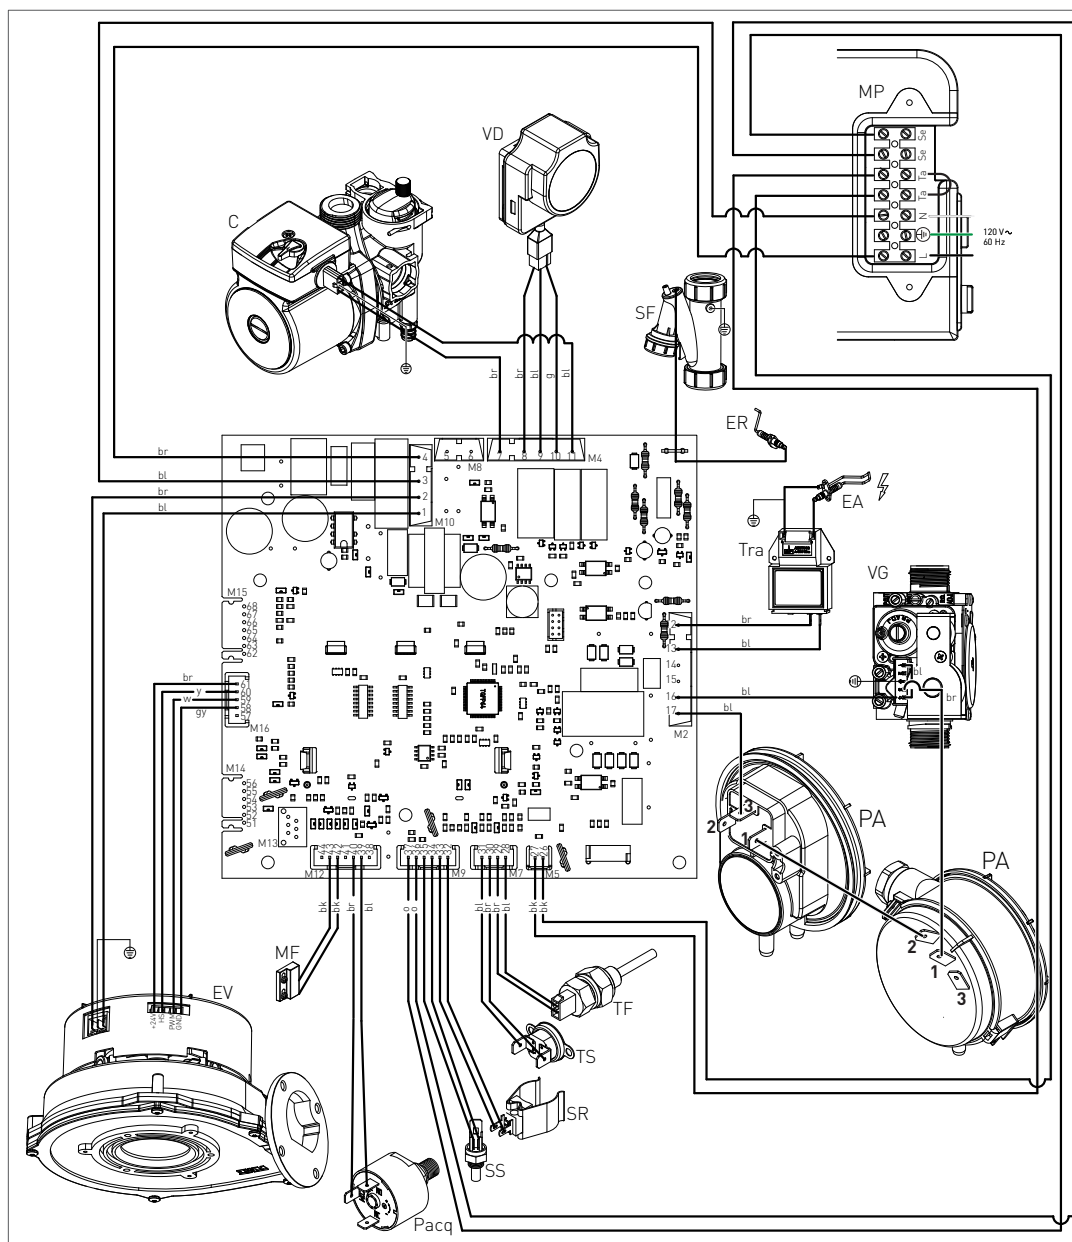

ER: IONIZATION ELECTRODE	TS: WATER TEMPERATURE HIGH LIMIT SWITCH	MP: PANEL TERMINAL	BL: BLUE
EA: SPARK ELECTRODE	PACQ: WATER PRESSURE TRANSDUCER	SE: OUTDOOR TEMPERATURE	BR: BROWN
C: CIRCULATOR	MF: MICRO-FLOW SWITCH	TA: ENVIRONMENT THERMOSTAT	O: ORANGE
VG: GAS VALVE	SR: CENTRAL HEATING TEMPERATURE PROBE	L: LINE	Y: YELLOW
TRA: IGNITION TRANSFORMER	SS: DOMESTIC TEMPERATURE PROBE	N: NEUTRAL	W: WHITE
TF: EXHAUST SAFETY HIGH LIMIT SWITCH (102°C)	EV: COMBUSTION BLOWER	BK: BLACK	GY: GREY
VD: DIVERTER VALVE	PA: AIR PRESSURE SWITCH	G: GREEN	SF: CONDENSATE COLLECTION SIPHON